



DETAIL PROTECTION




- TRIFLEX CRYL FINISH 209 (THIXO IF VERTICAL > 250mm) @ 0.50 Kg/m² MIN.
- TRIFLEX 110g REINFORCEMENT FLEECE
- TRIFLEX PRODETAIL® @ 3.00 Kg/m² MIN.
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC SUBSTRATE (PREPARED)

MAIN AREA WATERPROOFING



- TRIFLEX CRYL FINISH 209 @ 0.60 Kg/m² MIN.
- TRIFLEX DECKFLOOR RS @ 4.00 Kg/m² MIN. WITH TRIFLEX QUARTZ (0.7 - 1.2mm) @ 5.00 Kg/m² APPROX.
- TRIFLEX PROPARK® @ 3.00 Kg/m² MIN.
- TRIFLEX 110g REINFORCEMENT FLEECE
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC DIMENSIONALLY STABLE / SUITABLE SUBSTRATE (PREPARED)

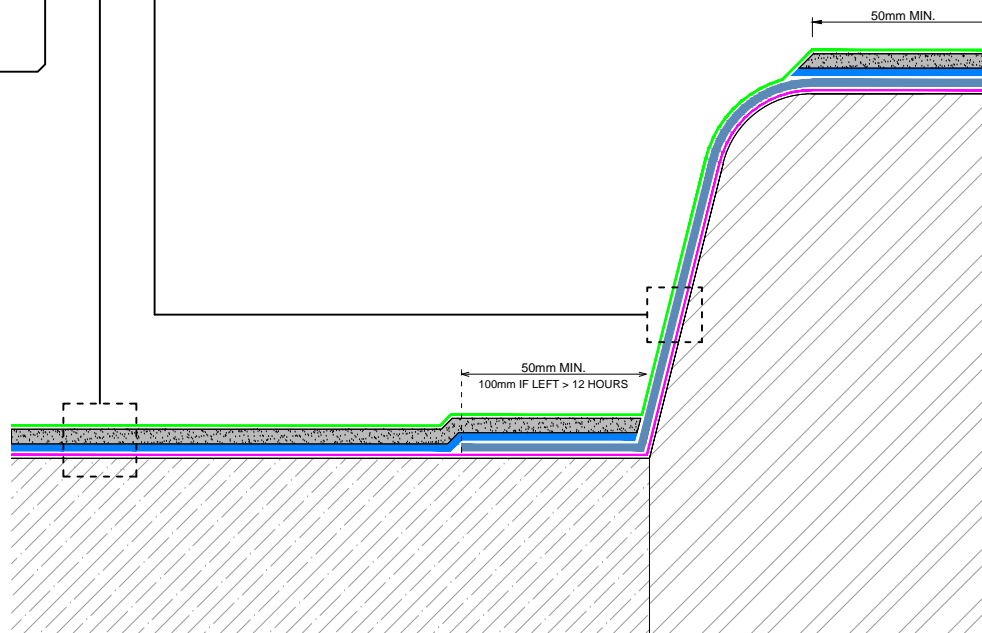


GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

INDICATIVE SYSTEM BUILD-UP



SYSTEM

TRIFLEX PROPARK HD WITH QUARTZ 0.7 - 1.2mm

PROJECT

STANDARD

DETAIL

KERB - FULLY ENCAPSULATED WITH WATERPROOFING AND SURFACING

DRAWING NUMBER

PROPARK HD WITH QUARTZ
_32_KERB - FULLY
ENCAPSULATED WITH
WATERPROOFING AND
SURFACING

SCALE

NTS

DATE

10/08/2018

Triflex

Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs
ST15 8JS | Tel: 01785 819119
www.triflex.co.uk | info@triflex.co.uk



CAR PARK | MARKINGS | REPAIRS