



## DETAIL PROTECTION



- TRIFLEX CRYL FINISH 209 @ 0.50 Kg/m<sup>2</sup> MIN.
- TRIFLEX PROFIBRE® @ 3.00 Kg/m<sup>2</sup> MIN.  
APPLIED IN TWO APPLICATIONS @ 1.50 Kg/m<sup>2</sup> MIN.
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION)
- GENERIC SUBSTRATE (PREPARED)

## MAIN AREA PROTECTION AND SURFACING




- TRIFLEX CRYL FINISH 209 @ 0.55 Kg/m<sup>2</sup> MIN.
- TRIFLEX CRYL RS 246 @ 2.40 Kg/m<sup>2</sup> MIN.  
WITH TRIFLEX QUARTZ (0.4 - 1.2mm)  
EMBEDDED @ 5.00 Kg/m<sup>2</sup>
- TRIFLEX PRIMER IF REQUIRED  
(REFER TO PROJECT SPECIFICATION)
- CONCRETE SUBSTRATE (PREPARED)

## NOTES

- 1 MECHANICAL DAMAGE TO BE TREATED AS MAINTENANCE ITEM

## DETAIL PROTECTION AND SURFACING




- TRIFLEX PRECO CRYL REIBEPLASTIK  
@ 4.00 Kg/m<sup>2</sup> MIN.
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION)
- GENERIC SUBSTRATE (PREPARED)

## GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex PROJECT specification and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

## INDICATIVE SYSTEM BUILD-UP



## SYSTEM

TRIFLEX DCS-C WITH QUARTZ  
0.4 - 1.2mm

## PROJECT

STANDARD

## DETAIL

KERB - UPSTAND LESS  
CRITICAL- HIGH VISIBILITY  
MAINTENANCE COATING

## DRAWING NUMBER

DCS-C WITH QUARTZ\_022\_  
CAST INSITU KERB - UPSTAND  
LESS CRITICAL - HIGH  
VISIBILITY MAINTENANCE  
COATING

## SCALE

NTS

## DATE



04/01/2018

**Triflex**

Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs  
ST15 8JS | Tel: 01785 819119  
www.triflex.co.uk | info@triflex.co.uk

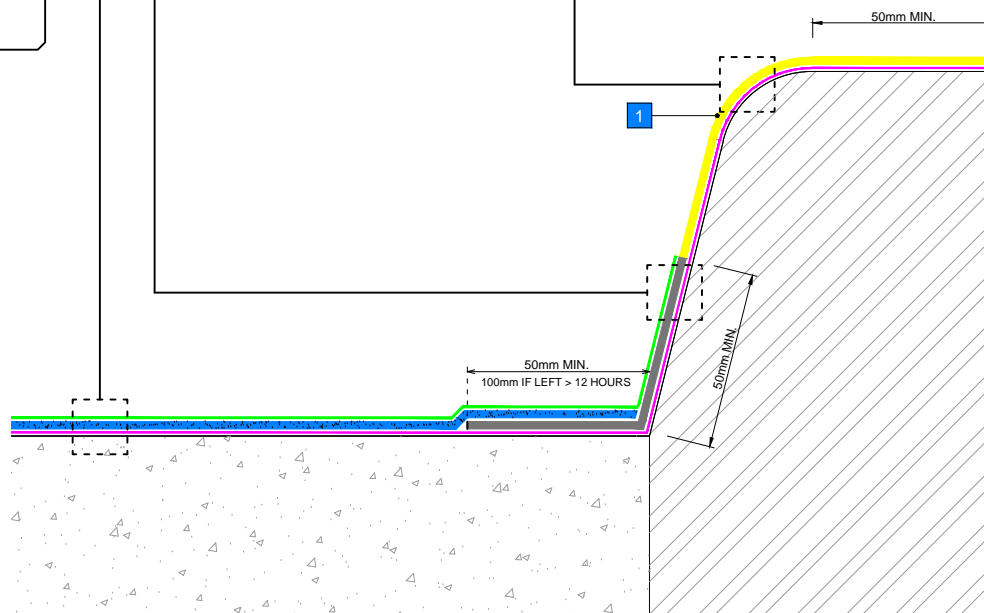

CAR PARK | MARKINGS | REPAIRS