



## DETAIL WATERPROOFING



- TRIFLEX PRODETAIL<sup>®</sup> @ 3.00 Kg/m<sup>2</sup> MIN.
- TRIFLEX 110g REINFORCEMENT FLEECE
- TRIFLEX PRIMER (IF REQUIRED - REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC SUBSTRATE (PREPARED)

## NOTES

- 1 TRIFLEX PRODETAIL<sup>®</sup> @ 1.50 Kg/m<sup>2</sup> MIN. WITH TRIFLEX QUARTZ (0.7 - 1.2mm) @ 5.00 Kg/m<sup>2</sup> APPROX. TO CREATE AN IMPACT RESISTANT KEY. ALLOW TO CURE AND REMOVE EXCESS QUARTZ.

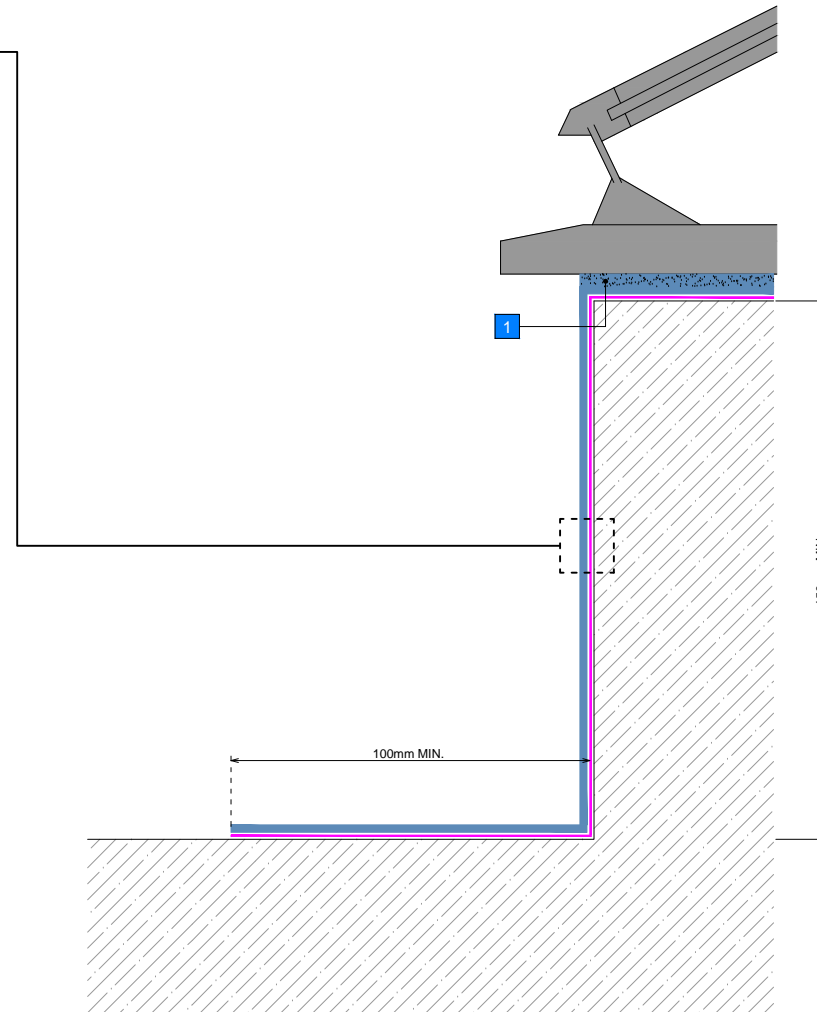

## GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

## INDICATIVE SYSTEM BUILD-UP



## SYSTEM

TRIFLEX PRODETAIL<sup>®</sup>

## PROJECT

STANDARD

## DETAIL

UPSTAND WITH ACCESS HATCH - WATERPROOFING BENEATH HATCH

## DRAWING NUMBER

PRODETAIL\_020\_UPSTAND WITH ACCESS HATCH- WATERPROOFING BENEATH HATCH

## SCALE

NTS

## DATE


26/06/2018

**Triflex**

Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs  
ST15 8JS | Tel: 01785 819119  
www.triflex.co.uk | info@triflex.co.uk



ROOFS | ROOF DETAILS | REPAIRS