


DETAIL WATERPROOFING

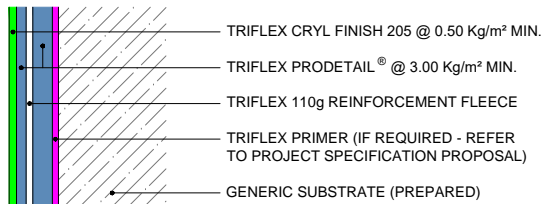

TRIFLEX CRYL FINISH 205 @ 0.50 Kg/m² MIN.

TRIFLEX PRODETAIL® @ 3.00 Kg/m² MIN.


TRIFLEX 110g REINFORCEMENT FLEECE

TRIFLEX PRIMER (IF REQUIRED - REFER TO PROJECT SPECIFICATION PROPOSAL)

GENERIC SUBSTRATE (PREPARED)

NOTE: HEAVY DUTY WEARING LAYER MAY BE EXTENDED ONTO VERTICAL / INCLINED SURFACES (IF REQUIRED)

DETAIL WATERPROOFING (HEAVY DUTY)

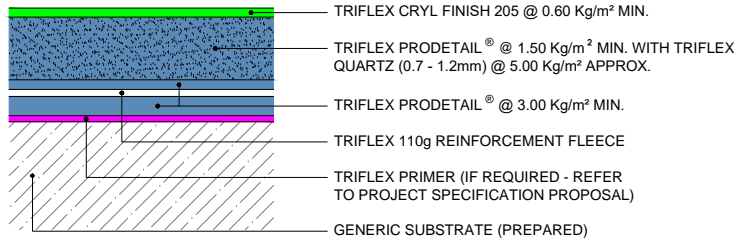

TRIFLEX CRYL FINISH 205 @ 0.60 Kg/m² MIN.

TRIFLEX PRODETAIL® @ 1.50 Kg/m² MIN. WITH TRIFLEX QUARTZ (0.7 - 1.2mm) @ 5.00 Kg/m² APPROX.

TRIFLEX PRODETAIL® @ 3.00 Kg/m² MIN.


TRIFLEX 110g REINFORCEMENT FLEECE

TRIFLEX PRIMER (IF REQUIRED - REFER TO PROJECT SPECIFICATION PROPOSAL)

GENERIC SUBSTRATE (PREPARED)

NOTES

- 1 STAR CUT REINFORCEMENT FLEECE AROUND FIXINGS AND MAKE GOOD WITH TRIFLEX CRYL PASTE
- 2 TRIFLEX PROFIBRE® @ 3.00 Kg/m² MIN. TO ENCAPSULATE FIXINGS

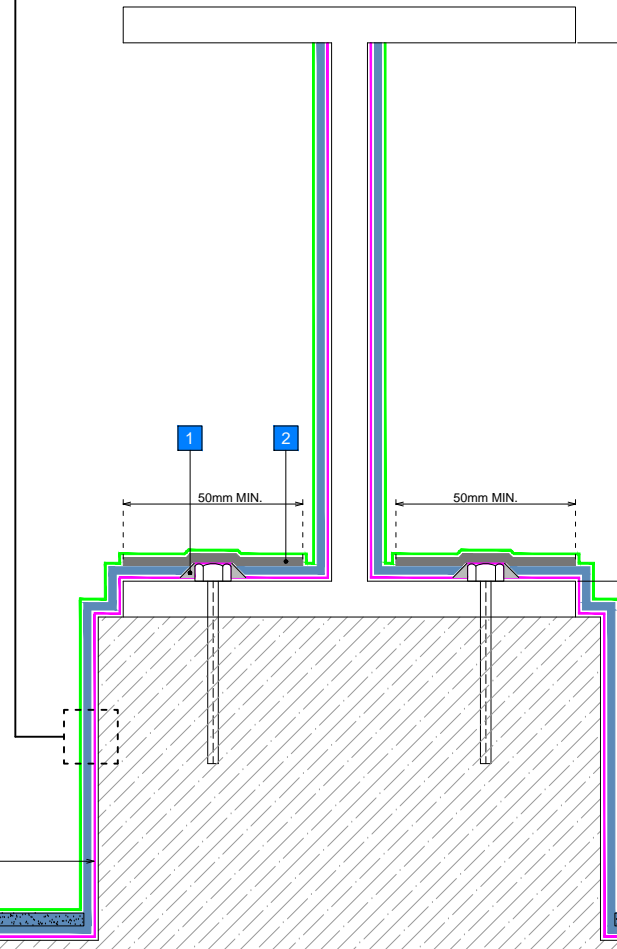

GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

INDICATIVE SYSTEM BUILD-UP



SYSTEM

TRIFLEX PRODETAIL® WITH HEAVY DUTY FINISH

PROJECT

STANDARD

DETAIL

PLINTH WITH SURFACE MOUNTED DETAIL

DRAWING NUMBER

PRODETAIL_HD_255_PLINTH WITH SURFACE MOUNTED DETAIL

SCALE

NTS

DATE

26/06/2018



ROOFS | ROOF DETAILS | REPAIRS

Triflex
Delivering solutions together.

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs
ST15 8JS | Tel: 01785 819119
www.triflex.co.uk | info@triflex.co.uk