



## DETAIL PROTECTION



- TRIFLEX CRYL FINISH 209 (THIXO IF VERTICAL > 250mm) @ 0.50 Kg/m<sup>2</sup> MIN.
- TRIFLEX 110g REINFORCEMENT FLEECE
- TRIFLEX PRODETAIL® @ 3.00 Kg/m<sup>2</sup> MIN.
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC SUBSTRATE (PREPARED)


## MAIN AREA WATERPROOFING



- TRIFLEX CRYL FINISH 209 @ 0.60 Kg/m<sup>2</sup> MIN.
- TRIFLEX DECKFLOOR RS @ 4.00 Kg/m<sup>2</sup> MIN. (CONCRETE)  
4.50 Kg/m<sup>2</sup> MIN. (ASPHALT)  
WITH TRIFLEX QUARTZ (0.7 - 1.2mm / 0.4 - 1.2mm) @ 5.00 Kg/m<sup>2</sup> APPROX.
- TRIFLEX PRIMER (REFER TO PROJECT SPECIFICATION PROPOSAL)
- GENERIC DIMENSIONALLY STABLE / SUITABLE SUBSTRATE (PREPARED)

## NOTES

- 1 MECHANICAL DAMAGE TO BE TREATED AS MAINTENANCE ITEM

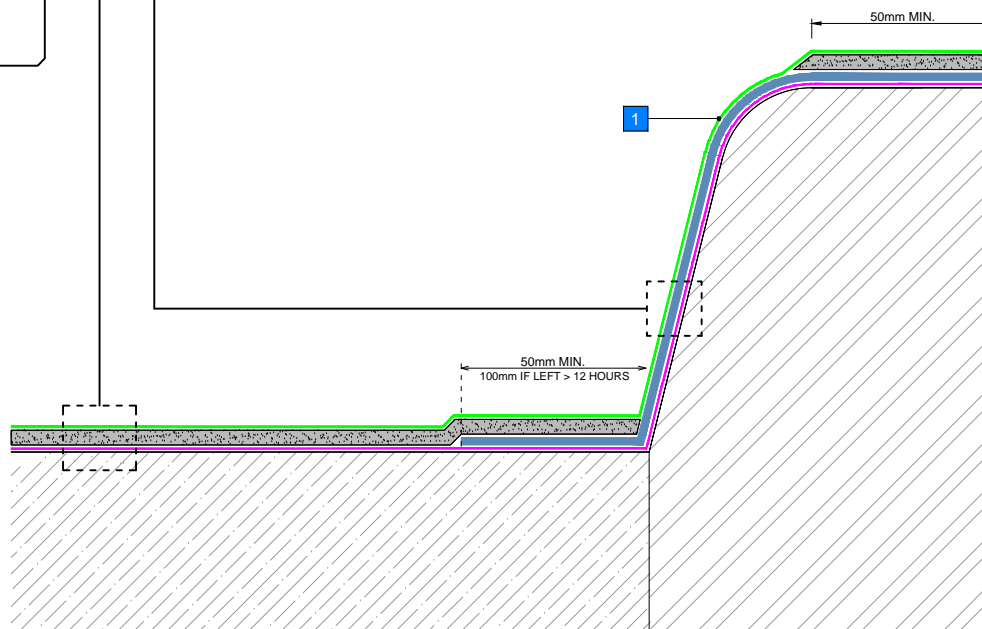


## GENERAL NOTES

This drawing and any reference to structural / thermal elements should be treated as indicative only and read in conjunction with the Triflex Project specification proposal and relevant Triflex technical data. Details should be verified for accuracy and suitability as we specifically exclude any liability for errors, omissions or otherwise.

The drawing should not be reproduced or amended except with the written permission of Triflex. Do not scale, use figured dimensions only, and check all dimensions on site.

## INDICATIVE SYSTEM BUILD-UP



## SYSTEM

TRIFLEX DECKFLOOR WITH QUARTZ 0.7 - 1.2mm OR 0.4 - 1.2mm

## PROJECT STANDARD

## DETAIL

KERB - FULLY ENCAPSULATED WITH PROTECTION AND SURFACING

## DRAWING NUMBER

DECKFLOOR WITH QUARTZ  
\_32\_KERB - FULLY ENCAPSULATED WITH PROTECTION AND SURFACING


SCALE  
NTS

DATE  
13/08/2018

**Triflex**  
Delivering solutions together

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs  
ST15 8JS | Tel: 01785 819119  
www.triflex.co.uk | info@triflex.co.uk



CAR PARK | MARKINGS | REPAIRS