



DETAIL A

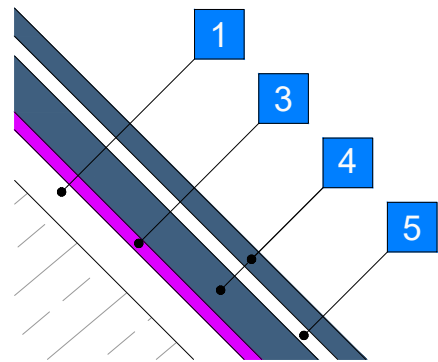


DETAIL B

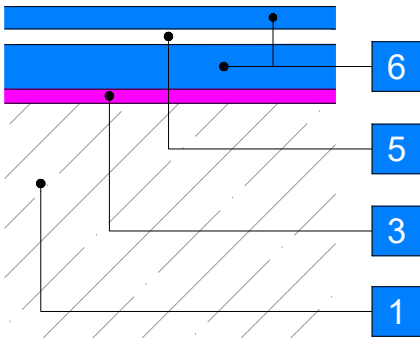

LEGEND

- 1 GENERIC SUBSTRATE (PREPARED)
- 2 LIFT OUTLET COVER / GUARD TO ALLOW FOR PREPARATION, PRIMING AND WATERPROOFING INSTALLATION AND REINSTATE
- 3 TRIFLEX PRIMER (IF REQUIRED - REFER TO PROJECT SPECIFICATION PROPOSAL)
- 4 TRIFLEX PRODETAIL® @ 3.00Kg/m² MIN.
- 5 TRIFLEX 110g REINFORCEMENT FLEECE
- 6 TRIFLEX PROTECT® @ 3.00Kg/m² MIN.

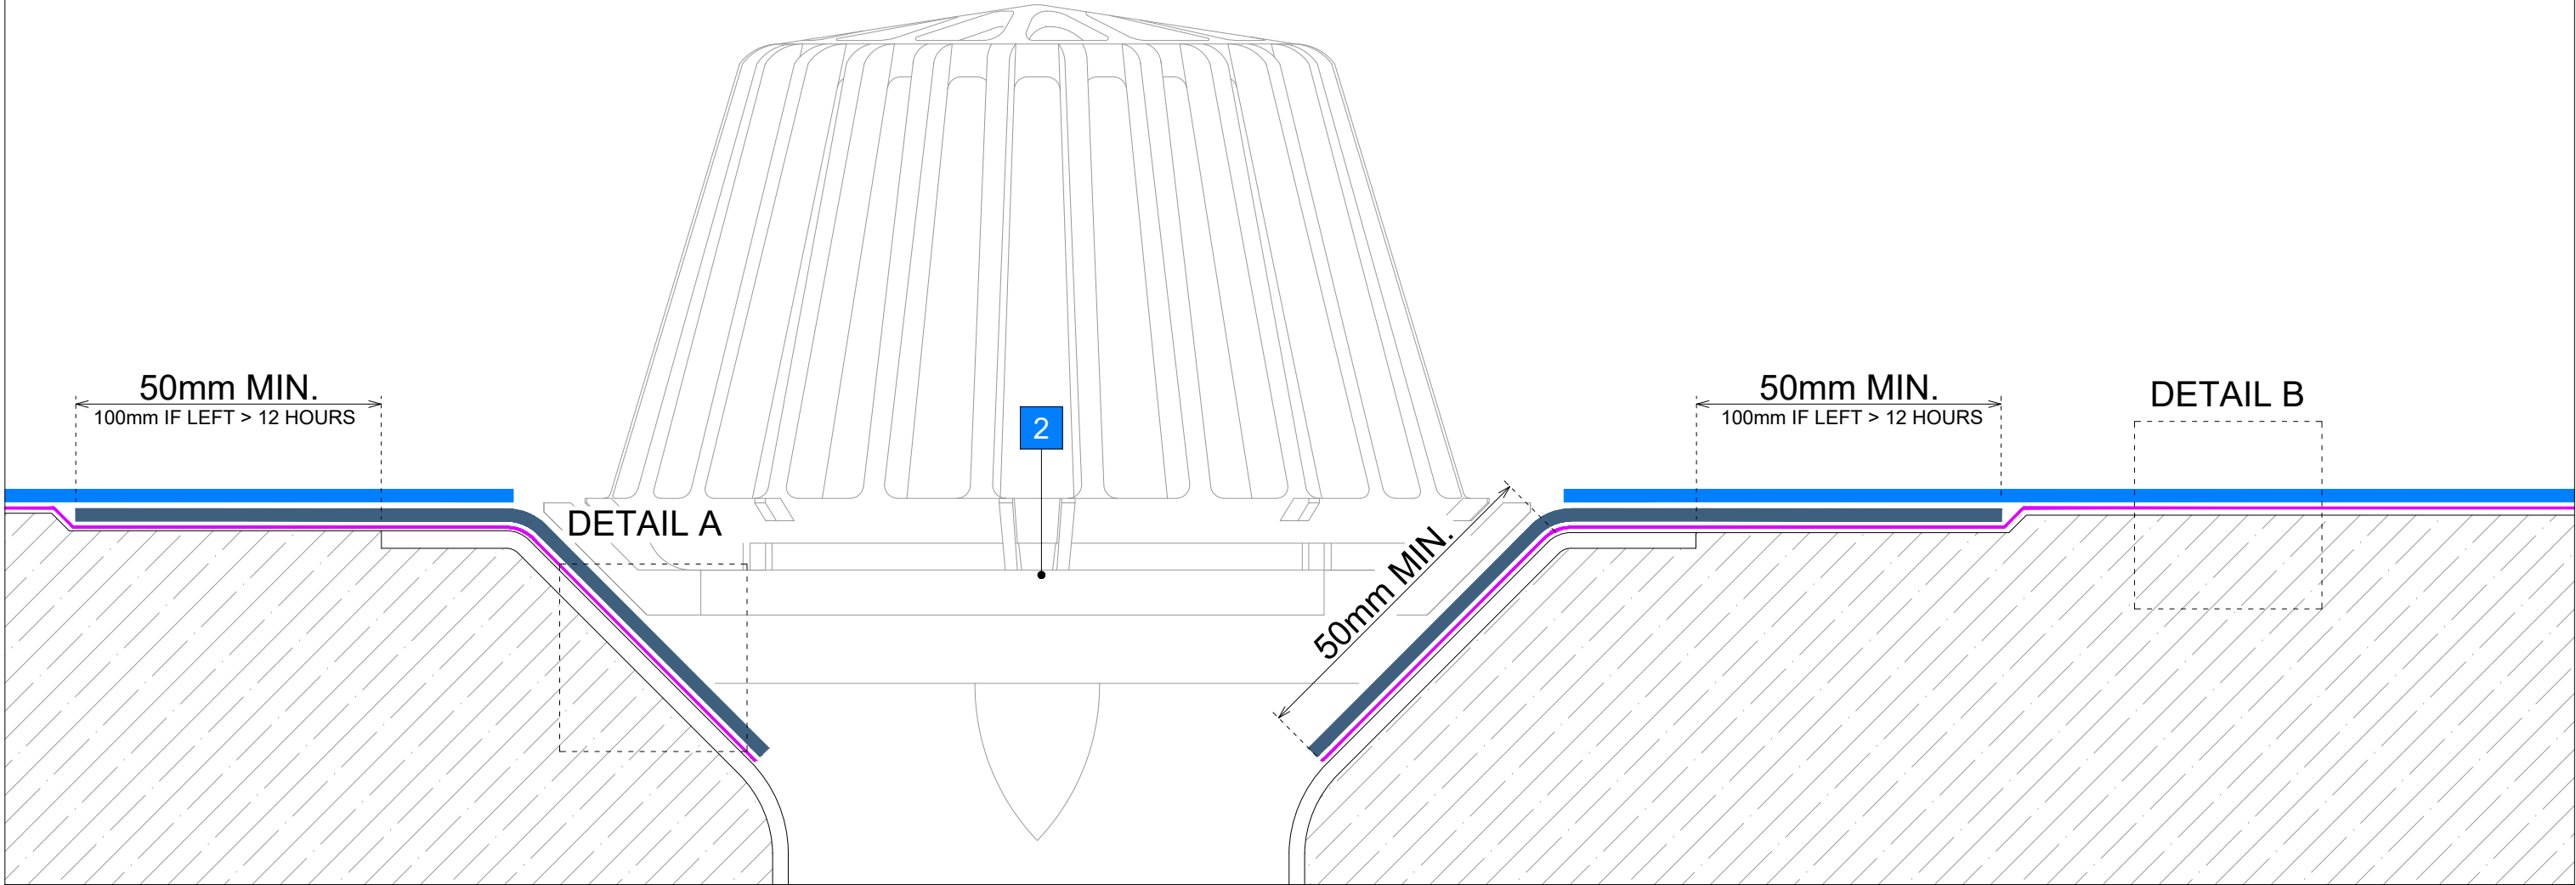

Triflex (UK) Limited

Whitebridge Way | Stone | Staffs  
ST15 8JS | Tel: 01785 819119  
www.triflex.co.uk | info@triflex.co.uk

GENERAL NOTES

This drawing is indicative only and illustrates the application of Triflex systems. Any references to structural or thermal elements are for context and should not be treated as design information.

All information is based on Triflex's interpretation of current legislation, relevant standards - including guidance from BS 6229 (*Flat roofs with continuously supported flexible waterproof coverings - Code of practice*) - and industry best practice at the date of issue. Whilst we have endeavoured to follow this guidance, it remains the responsibility of the Designer or Principal Designer to verify all details for accuracy, suitability, and compliance with applicable regulations. Triflex accepts no design responsibility or liability for errors or omissions.

This drawing must be read in conjunction with the Triflex Project Specification Proposal (where issued, this takes precedence) and the relevant Triflex technical data.

Do not scale - use figured dimensions only and verify all dimensions on site. This drawing may not be reproduced or modified without written permission from Triflex.

SYSTEM / PROJECT

TRIFLEX PROTECT®

DETAIL

OUTLET WITH LEAF DEBRIS GUARD

DRAWING NUMBER

TUK-S-PT-S-252

SCALE

Not to scale

REVISION NUMBER

-

REVISION DATE

31/05/2025